


- NOTES
- HORIZONTAL CONTROL IS ALASKA STATE PLANE, ZONE 4, NAD83 IN U.S. SURVEY FEET HOLDING USACE "TERRA 11" AS N 2,644,969.84, E 1,660,159.24.
 - VERTICAL CONTROL: ELEVATIONS ARE MEAN LOWER LOW WATER (MLLW) TIDAL DATUM EPOCH 1983-2001, EXPRESSED IN U.S. SURVEY FEET. PRELIMINARY ELEVATIONS WERE ACQUIRED IN REFERENCE TO A SINGLE BENCHMARK HOLDING USACE "TERRA 11" AS 80.48 FEET MLLW. FINAL DATA WERE ADJUSTED BASED ON THE C.I.N.C. CUSTOM MLLW PLANE DETERMINED FROM THE DOWL C.I.N.C. CONTROL SURVEY CONDUCTED IN FEBRUARY, 2013.
 - SOUNDINGS ARE IN FEET AND ARE MINUS UNLESS OTHERWISE INDICATED.
 - THIS DRAWING INDICATES GENERAL CONDITIONS AT THE TIME OF SURVEY.
 - SURVEY WAS CONDUCTED ON APRIL 23, 2013 BY ETRAC ENGINEERING, INC. SOUNDINGS WERE COLLECTED USING AN R2SONIC 2024 MULTIBEAM DEPTH SOUNDER (200KHZ, 120-DEGREE SWATH-WIDTH WITH 256, 0.5 DEGREE BEAMS). SOUND VELOCITY PROFILES WERE MEASURED USING AN ODOM DIGI-BAR PRO. SOUND VELOCITY WAS MEASURED IN REAL TIME AT THE SOUNDER HEAD USING A VALEPORT MINIVIS.
 - VESSEL POSITIONING, HEADING, ATTITUDE, AND RTK TIDES WERE PROVIDED IN REAL TIME USING AN APPLANIX POSMV WAVEMASTER GPS/INERTIAL POSITIONING SYSTEM RECEIVING RTK CORRECTIONS FROM A TRIMBLE SPS855 RECEIVER SET AT CONTROL STATION "TERRA 11" LOCATED ATOP THE PORT OFFICE BUILDING. POST-PROCESS KINEMATIC CORRECTIONS USING POSCAP MMS 5.4 SOFTWARE WERE APPLIED TO DATA FOLLOWING ACQUISITION. VESSEL NAVIGATION, DATA ACQUISITION AND PROCESSING WERE PERFORMED USING GPS INTEGRATED SOFTWARE.

2013 DREDGE LIMITS			
NAME	NORTHING	EASTING	
C-1	2,628,320.37	1,618,085.73	
C-2	2,628,534.04	1,619,240.43	
C-3	2,633,360.88	1,628,352.82	
C-4	2,632,288.21	1,628,921.02	
C-5	2,627,635.82	1,620,141.11	
C-6	2,627,320.35	1,618,270.78	

2013 SURVEY LIMITS			
NAME	NORTHING	EASTING	
S-1	2,628,306.44	1,616,361.71	
S-2	2,628,820.67	1,619,140.63	
S-3	2,634,325.95	1,629,533.82	
S-4	2,632,722.93	1,630,382.13	
S-5	2,627,396.25	1,620,329.73	
S-6	2,626,716.44	1,616,655.94	
S-7	2,626,423.49	1,613,948.61	
S-8	2,626,423.49	1,616,773.28	
S-9	2,624,254.99	1,613,948.61	
S-10	2,624,254.99	1,616,773.28	

CONTROL DATA			
POINT ID	NORTHING	EASTING	ELEV. (MLLW)
PORT 1989	2,639,934.29	1,656,925.43	39.55
5920 THERMO 1 1988	2,642,784.70	1,660,183.87	37.32
S. END	2,644,296.27	1,659,738.03	40.50
ETRAC-2	2,644,443.04	1,660,120.66	36.38
TERRA 11	2,644,969.84	1,660,159.24	80.48
TERRA 12	2,644,990.65	1,660,186.56	81.21
ETRAC-1	2,646,395.57	1,660,814.72	38.34
N. END	2,646,649.84	1,660,584.80	41.56
USACE SBC 1978 (APPROX STA 88+73.00)			




THIS HYDROGRAPHIC SURVEY WAS COMPLETED UNDER THE OVERSIGHT OF AN ACSM/THSOA CERTIFIED HYDROGRAPHER

W Mel Saunders

W MEL SAUNDERS CH(152)

BATHYMETRY

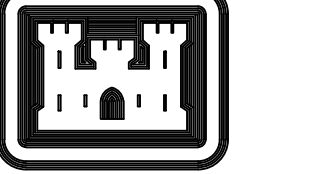

US ARMY CORPS OF ENGINEERS ALASKA DISTRICT

CONTRACT NO. W911KB-10-0005

CONTRACTOR ETRAC ENGINEERING, INC.

CITY SAN RAFAEL STATE CA

Date: _____

Approved: _____

Recommended: _____

Resident Engineer: _____

06/13/13

Dwg Scale: 1" = 200'

Plot Scale: 1:1

File: FILE_20130423_PREL.dwg

Submitted: A. CHURCHILL

Chief: _____

Branch: _____

Designed: S. OLSON

Drawn: S. OLSON

Reviewed: J. ANDERSON

Section: _____

US ARMY ENGINEER DISTRICT CORPS OF ENGINEERS ANCHORAGE, ALASKA

USACE Survey No: 3090-13

COOK INLET, ALASKA

COOK INLET NAVIGATION CHANNEL



PREDREDGE SURVEY

APRIL 23, 2013

Reference number:

V-102

Sheet 2 of 6

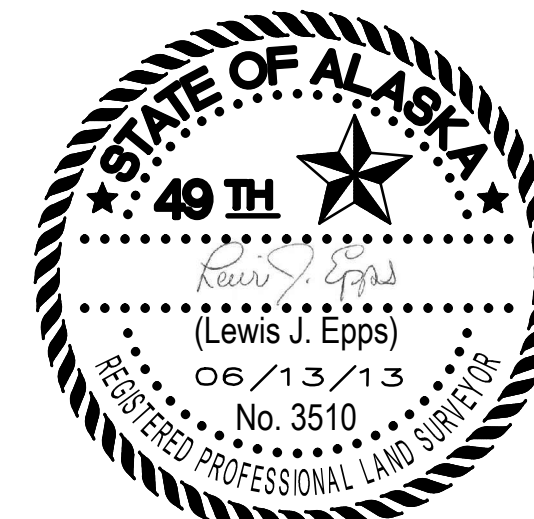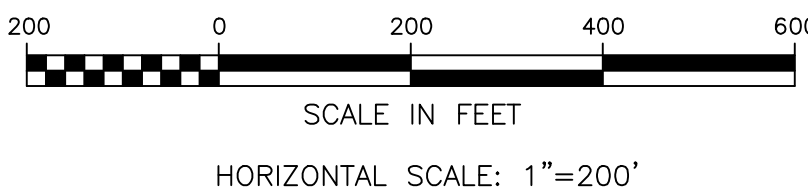


W MEL SAUNDERS CH(152)

BATHYMETRY

USACE Survey NO: 3091

Reference
number:

V-103
Sheet 3 of 6

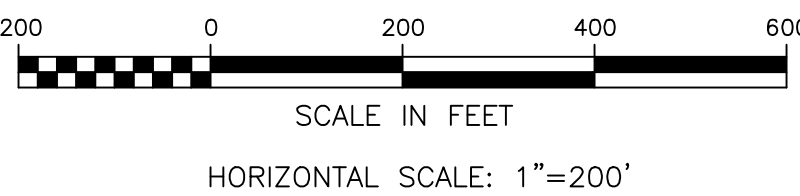

1. HORIZONTAL CONTROL IS ALASKA STATE PLANE, ZONE 4, NAD83 IN U.S. SURVEY FEET HOLDING U.S. SURVEY TERRA 11" AS N 2,644,969.84, E 1,660,159.24.
2. VERTICAL CONTROL: ELEVATIONS ARE MEAN LOWER LOW WATER (MLLW) TIDAL DATUM EPOCH 1983-2001, EXPRESSED IN U.S. SURVEY FEET. PRELIMINARY ELEVATIONS WERE ACQUIRED IN REFERENCE TO A SINGLE BENCHMARK HOLDING U.S. SURVEY TERRA 11" AS 80.48 FEET MLLW. FINAL DATA WERE ADJUSTED BASED ON THE C.I.N.C. CUSTOM MLLW PLANE DETERMINED FROM THE DOWL C.I.N.C. CONTROL SURVEY CONDUCTED IN FEBRUARY, 2013.
3. SOUNDINGS ARE IN FEET AND ARE MINUS UNLESS OTHERWISE INDICATED.
4. THIS DRAWING INDICATES GENERAL CONDITIONS AT THE TIME OF SURVEY.
5. SURVEY WAS CONDUCTED ON APRIL 23, 2013 BY ETRAC ENGINEERING, INC. SOUNDINGS WERE COLLECTED USING AN R230NIC 2024 MULTIBEAM DEPTH SOUNDER (200KHZ, 120-DEGREE FAN BEAM) WITH 256, 100-DEGREE BEAM. SOUND VELOCITY PROFILES WERE MEASURED USING AN ODOM DIO-BIAR PRO. SOUND VELOCITY WAS MEASURED IN REAL TIME AT THE SOUNDER HEAD USING A VALEPORT MINISIV.
6. VESSEL POSITIONING, HEADING, ATTITUDE, AND RTK TIDES WERE PROVIDED IN REAL TIME USING AN APPLANIX POSMV WAVEMASTER GPS/INERTIAL POSITIONING SYSTEM RECEIVING RTK CORRECTIONS FROM A TRIMBLE SP5855 RECEIVER SET AT CONTROL STATION "TERRA 11" LOCATED ATOP THE PORT OFFICE BUILDING. POST-PROCESS KINEMATIC CORRECTIONS USING POSPAC MMS 4.6 SOFTWARE WERE APPLIED TO DATA FOLLOWING ACQUISITION. VESSEL NAVIGATION, DATA ACQUISITION AND PROCESSING WERE PERFORMED USING GPS INTEGRATED SOFTWARE.

2013 DREDGE LIMITS			2013 SURVEY LIMITS		
NAME	NORTHING	EASTING	NAME	NORTHING	EASTING
C-1	2,628,320.37	1,618,085.73	S-1	2,628,306.44	1,616,361.71
C-2	2,628,334.04	1,619,240.43	S-2	2,628,820.97	1,619,140.63
C-3	2,633,360.88	1,628,352.82	S-3	2,634,325.95	1,629,533.82
C-4	2,632,288.21	1,628,921.02	S-4	2,632,722.91	1,630,382.13
C-5	2,627,635.82	1,620,141.11	S-5	2,627,396.25	1,620,325.73
C-6	2,627,320.35	1,618,270.78	S-6	2,626,716.44	1,616,655.94
			S-7	2,626,423.49	1,613,948.61
			S-8	2,626,423.49	1,616,773.28
			S-9	2,624,254.99	1,613,948.61
			S-10	2,624,254.99	1,616,773.28

CONTROL DATA				
POINT ID	NORTHING	EASTING	ELEV. (MLLV)	DESCRIPTION
PORT 1989	2,639,934.29	1,656,925.43	39.55	Almon
5920 THERIDA 1 1988	2,642,775.87	1,660,183.87	37.32	USACE STA 634
S	2,644,296.27	1,659,103.03	40.50	USACE STA 637 (67.98)
ETRAC-2	2,644,443.04	1,660,120.66	36.38	Brass Cap
TERRA 1	2,644,969.84	1,660,159.24	30.48	Antennae Reference Point
TERRA 12	2,644,990.05	1,660,156.50	61.21	Antennae Reference Point
ETRAC-2	2,646,359.87	1,660,814.72	38.34	Brass Cap
N	2,646,649.84	1,660,584.80	41.56	USACE STA 638 (APPROX) STA 684 (73.09)




W MEL SAUNDERS CH(152)

BATHYMETRY



CONTRACT NO. <u>W911KB-10-0005</u>	CONTRACTOR <u>ETRAC ENGINEERING, INC</u>	
CITY <u>SAN RAFAEL</u>	STATE <u>CA</u>	
Recommended:	Approved:	Date:
PRIME CONTRACTOR	RESIDENT ENGINEER	

[illegible]



	U.S. ARMY ENGINEER DISTRICT CORPS OF ENGINEERS ANCHORAGE, ALASKA		Designed: S. OLSON Drawn: S. OLSON Reviewed: J. ANDERSON Chief Engineer: A. CHURCHILL Date: _____	Date: 06/13/11 Drawing No.: 2007-001 Plot Scale: 1:1 File: PRE-20130422_PML.dwg
			Section _____ Sheet _____ of _____ Project: 3090-13	

COOK INLET, ALASKA
COOK INLET NAVIGATION CHANNEL
PREDREDGE SURVEY
APRIL 23, 2013

Reference
number:

V-104

Sheet 4 of 6

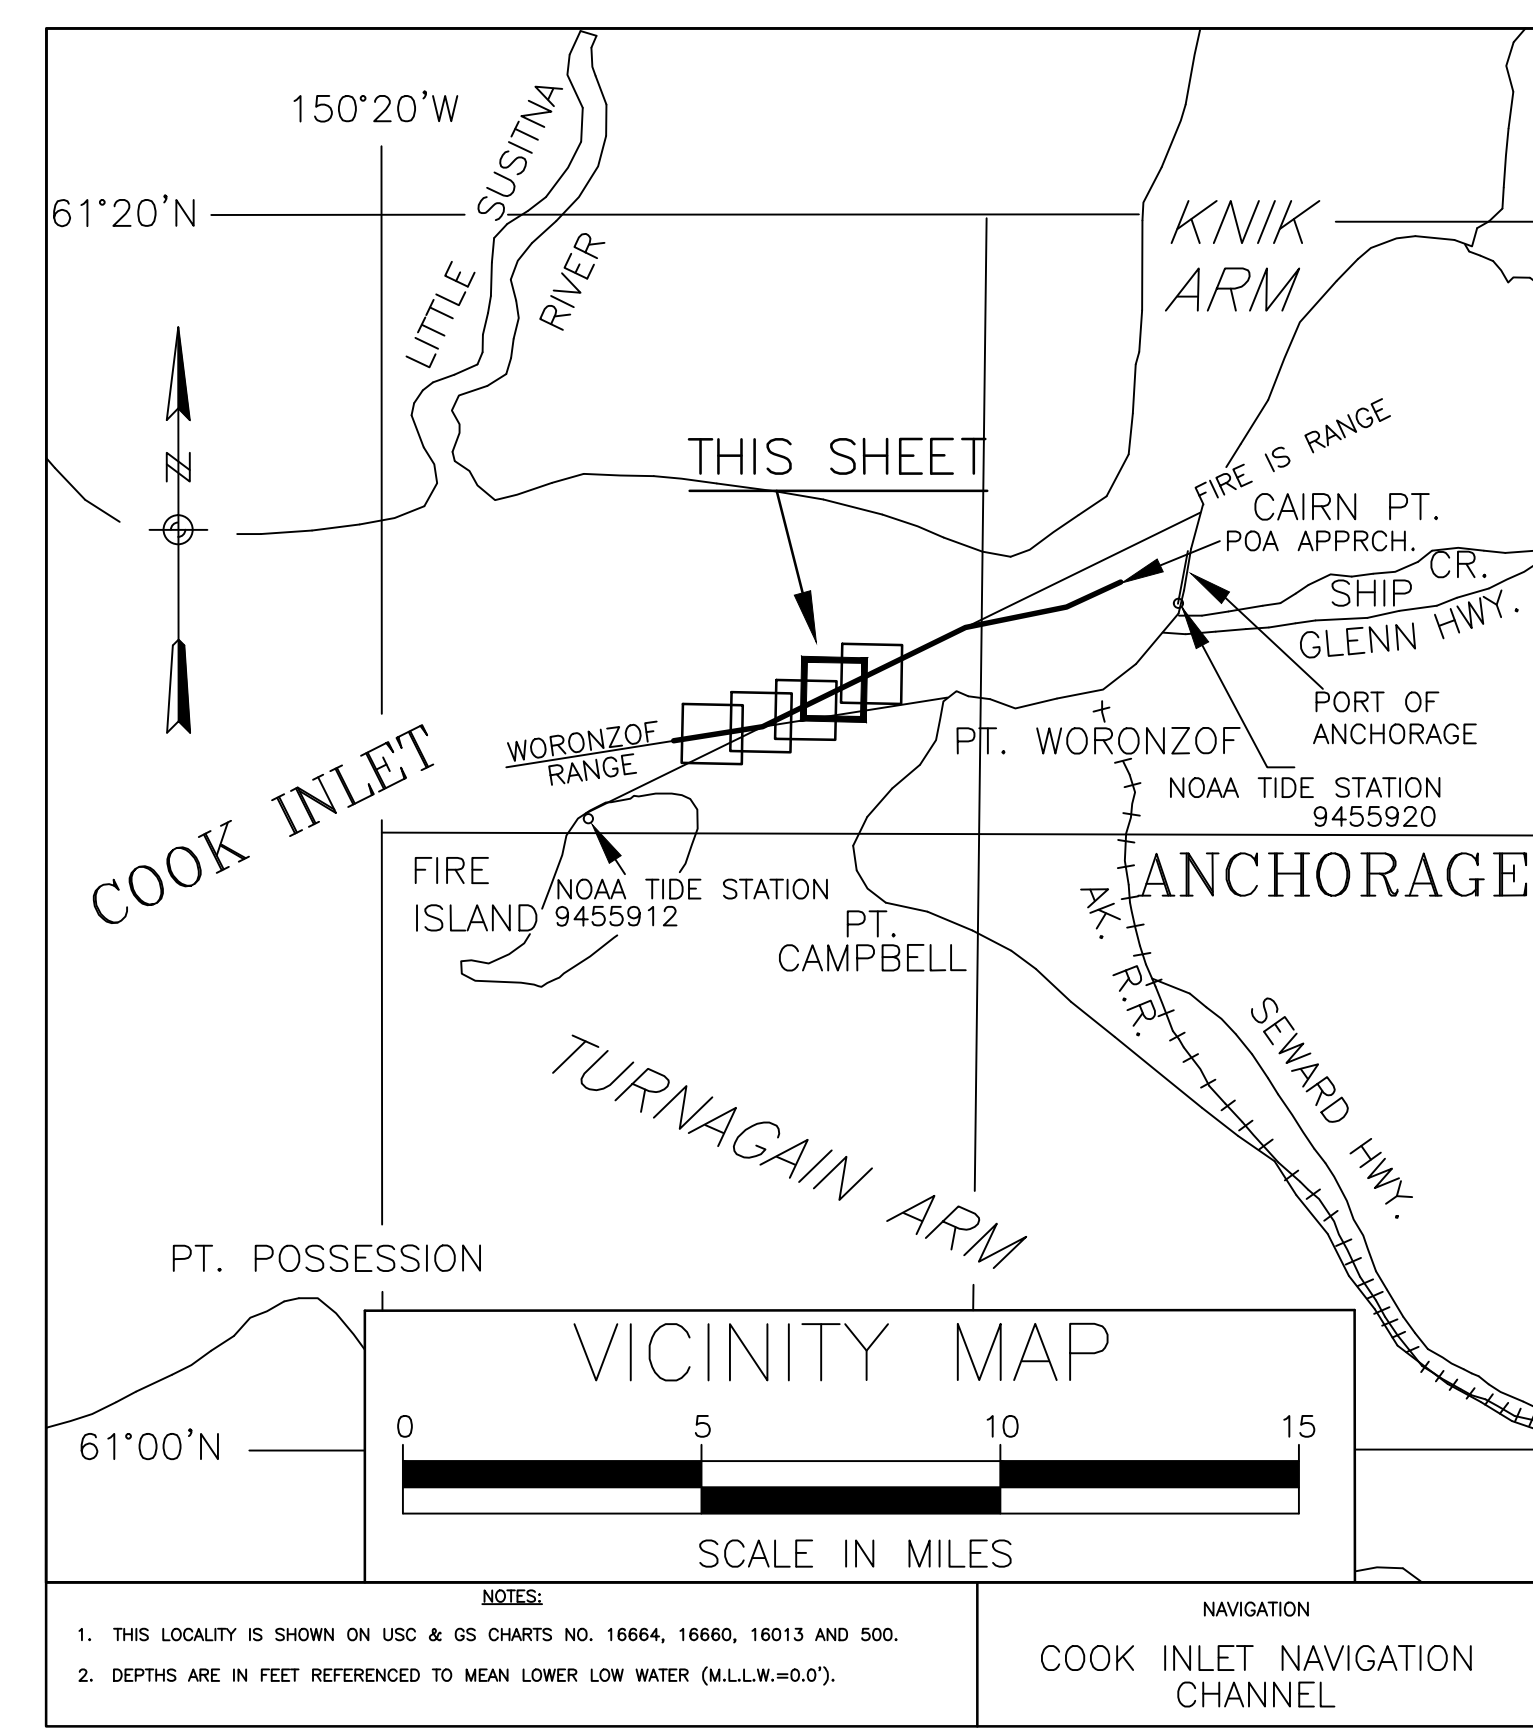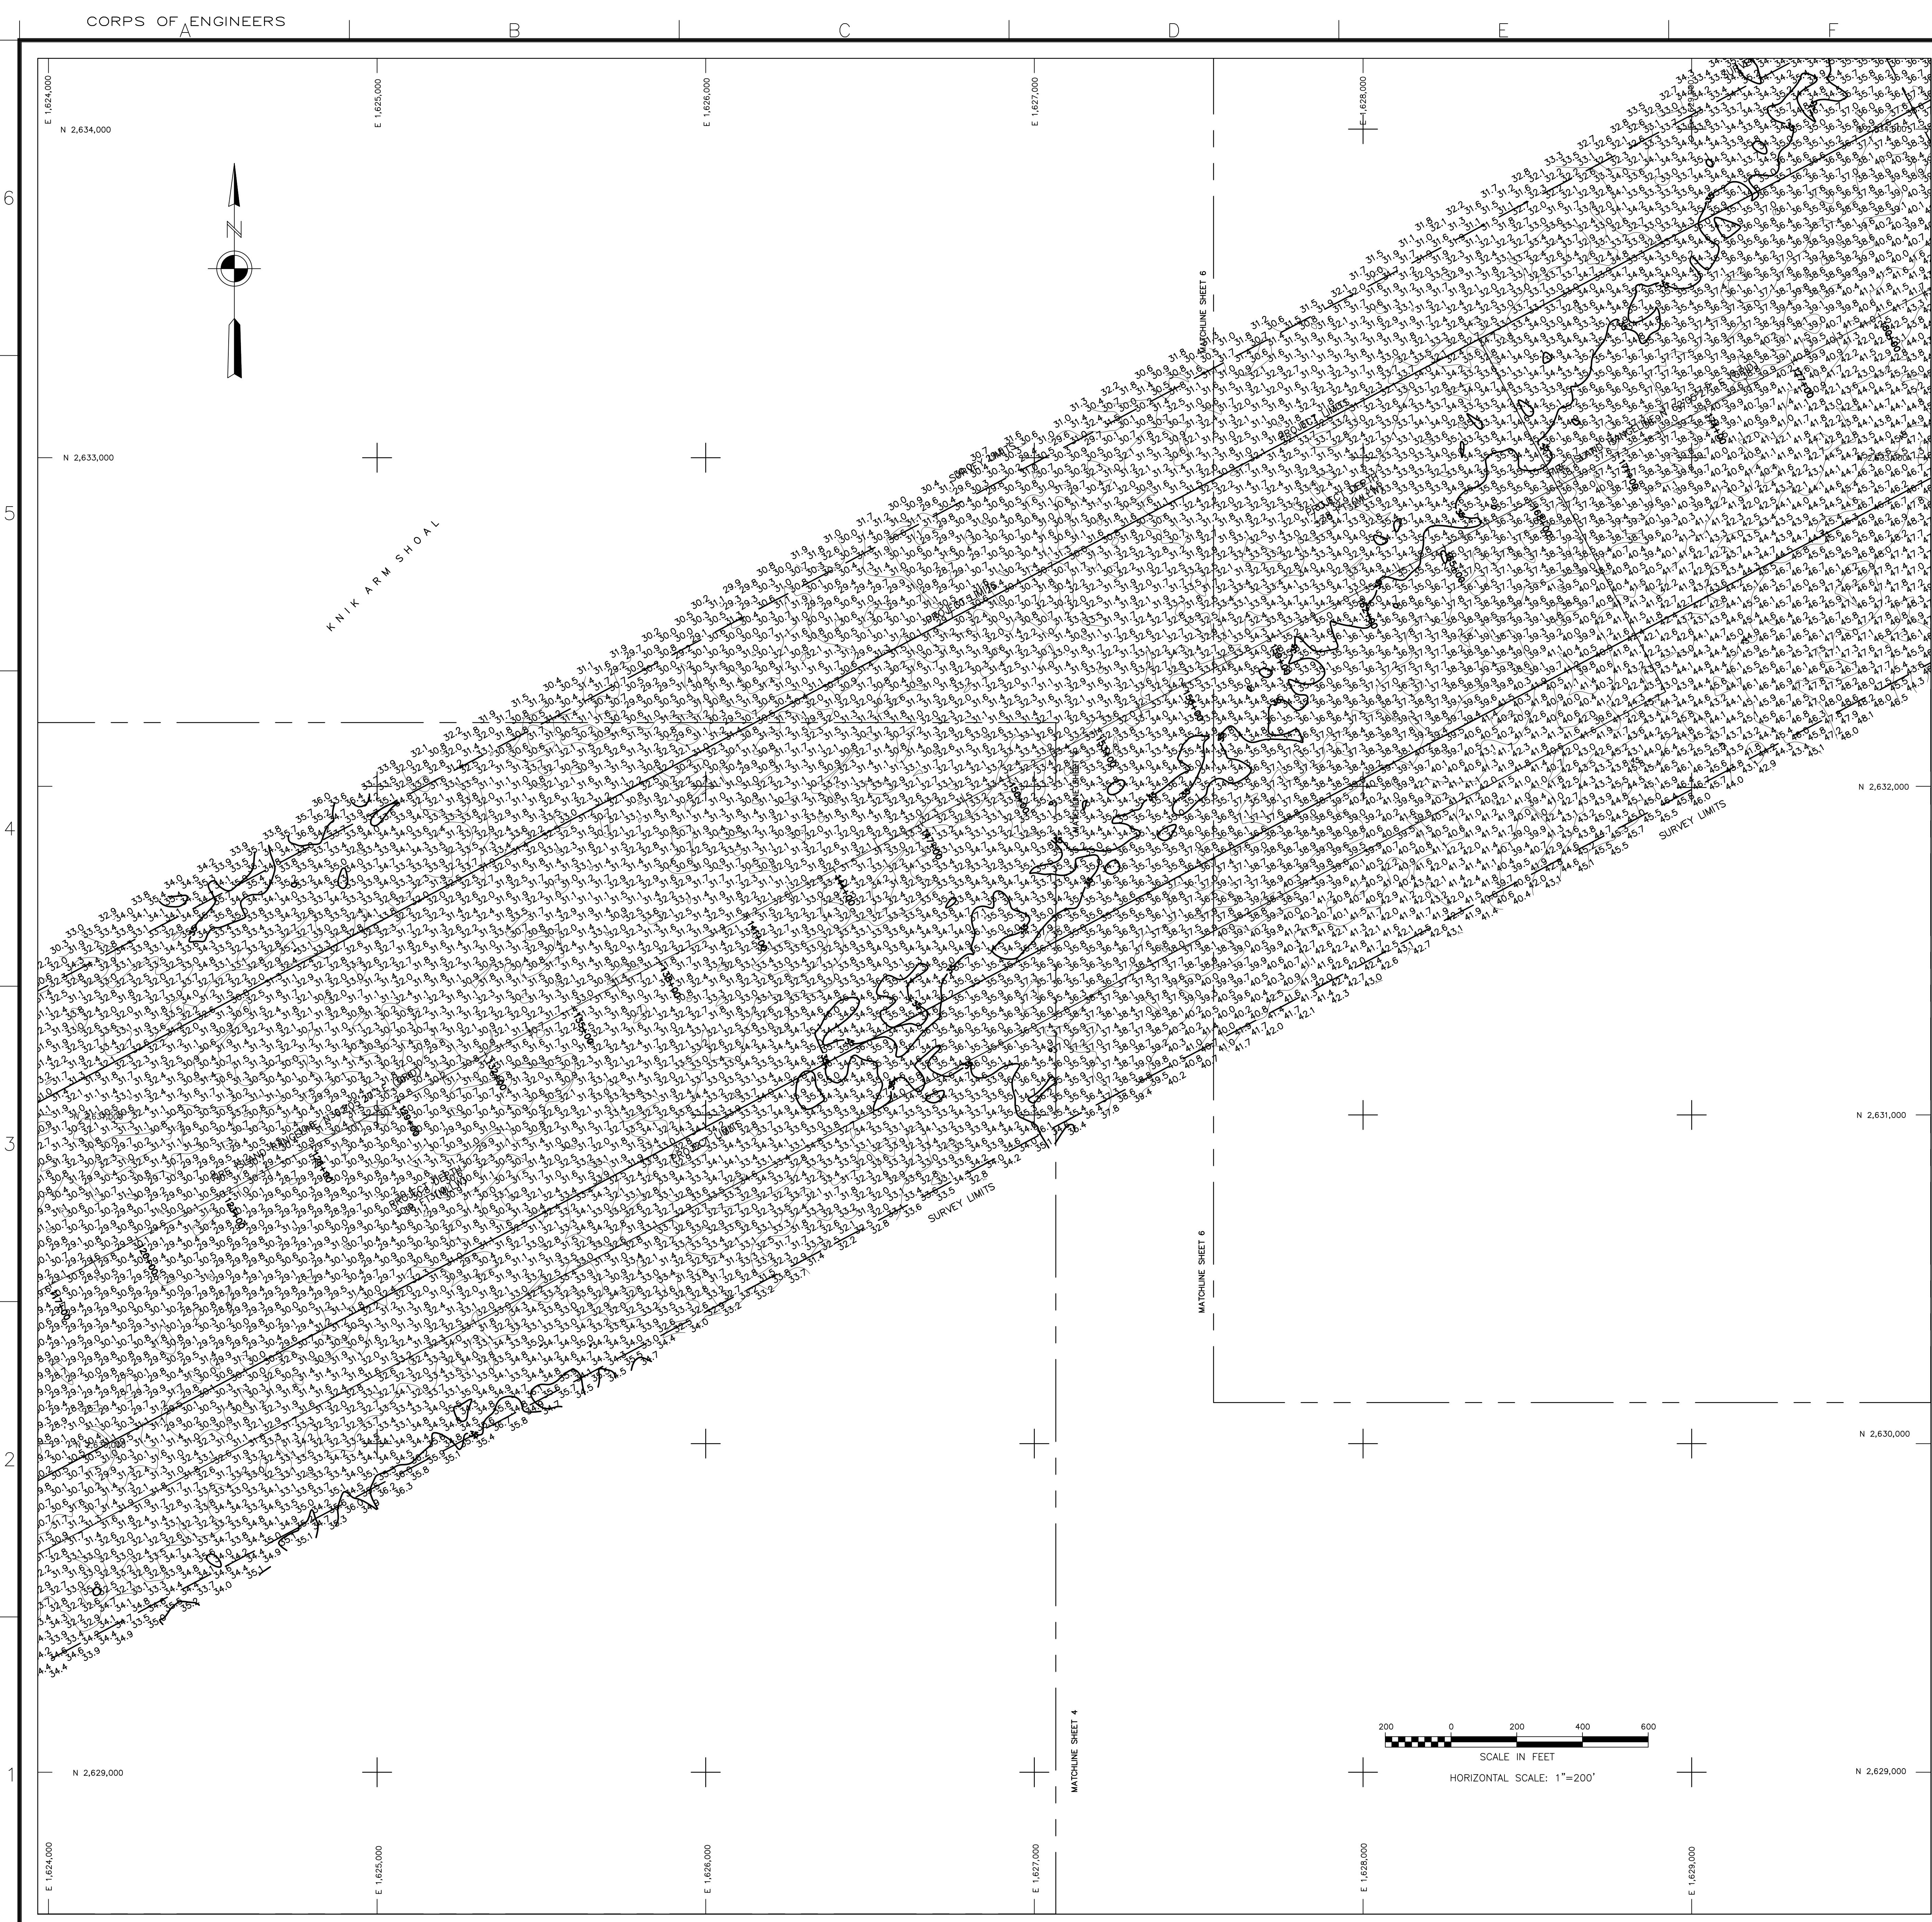


- NOTES
1. HORIZONTAL CONTROL IS ALASKA STATE PLANE, ZONE 4, NAD83 IN U.S. SURVEY FEET HOLDING USACE "TERRA 11" AS N 2,644,969.84, E 1,660,159.24.
 2. VERTICAL CONTROL: ELEVATIONS ARE MEAN LOWER LOW WATER (MLLW) TIDAL DATUM EPOCH 1983-2001, EXPRESSED IN U.S. SURVEY FEET. PRELIMINARY ELEVATIONS WERE ACQUIRED IN REFERENCE TO A SINGLE BENCHMARK HOLDING USACE "TERRA 11" AS 80.48 FEET MLLW. FINAL DATA WERE ADJUSTED BASED ON THE C.I.N.C. CUSTOM MLLW PLANE DETERMINED FROM THE DOWL C.I.N.C. CONTROL SURVEY CONDUCTED IN FEBRUARY, 2013.
 3. SOUNDINGS ARE IN FEET AND ARE MINUS UNLESS OTHERWISE INDICATED.
 4. THIS DRAWING INDICATES GENERAL CONDITIONS AT THE TIME OF SURVEY.
 5. SURVEY WAS CONDUCTED ON APRIL 23, 2013 BY ETRAC ENGINEERING, INC. SOUNDINGS WERE COLLECTED USING AN R2SONIC 2024 MULTIBeam DEPTH SOUNDER (200KHZ, 120-DEGREE SWATH-WIDTH WITH 256, 0.5 DEGREE BEAMS). SOUND VELOCITY PROFILES WERE MEASURED USING AN ODOM DIGI-BAR PRO. SOUND VELOCITY WAS MEASURED IN REAL TIME AT THE SOUNDER HEAD USING A VALEPORT MINISVS.
 6. VESSEL POSITIONING, HEADING, ATTITUDE, AND RTK TIDES WERE PROVIDED IN REAL TIME USING AN APPLANIX POSMV WAVEMASTER GPS/INERTIAL POSITIONING SYSTEM RECEIVING RTK CORRECTIONS FROM A TRIMBLE SPS855 RECEIVER SET AT CONTROL STATION "TERRA 11" LOCATED ATOP THE PORT OFFICE BUILDING. POST-PROCESS KINEMATIC CORRECTIONS USING POSPAC MMS 5.4 SOFTWARE WERE APPLIED TO DATA FOLLOWING ACQUISITION. VESSEL NAVIGATION, DATA ACQUISITION AND PROCESSING WERE PERFORMED USING GPS INTEGRATED SOFTWARE.

2013 DREDGE LIMITS			
NAME	NORTHING	EASTING	
S-1	2,628,306.44	1,616,361.71	
S-2	2,628,820.67	1,619,140.63	
S-3	2,634,325.95	1,629,533.82	
S-4	2,632,722.93	1,630,382.13	
S-5	2,627,396.25	1,620,329.73	
S-6	2,626,716.44	1,616,655.34	
S-7	2,626,423.49	1,613,948.61	
S-8	2,626,423.49	1,616,773.28	
S-9	2,624,254.99	1,613,948.61	
S-10	2,624,254.99	1,616,773.28	

2013 SURVEY LIMITS			
NAME	NORTHING	EASTING	
S-1	2,628,306.44	1,616,361.71	
S-2	2,628,820.67	1,619,140.63	
S-3	2,634,325.95	1,629,533.82	
S-4	2,632,722.93	1,630,382.13	
S-5	2,627,396.25	1,620,329.73	
S-6	2,626,716.44	1,616,655.34	
S-7	2,626,423.49	1,613,948.61	
S-8	2,626,423.49	1,616,773.28	
S-9	2,624,254.99	1,613,948.61	
S-10	2,624,254.99	1,616,773.28	


CONTROL DATA			
POINT ID	NORTHING	EASTING	ELEV. (MLLW)
PORT 1989	2,639,934.29	1,656,925.43	39.55
5920 THERMO 1 1988	2,642,784.70	1,660,183.87	37.32
S. END	2,644,296.27	1,659,738.03	40.50
ETRAC-2	2,644,443.04	1,660,120.66	36.38
TERRA 11	2,644,969.84	1,660,159.24	80.48
TERRA 12	2,644,990.65	1,660,186.56	81.21
ETRAC-1	2,646,385.57	1,660,814.72	38.34
N. END	2,646,649.84	1,660,584.80	41.56
USACE SBC 1978 (APPROX STA 88+73.00)			



THIS HYDROGRAPHIC SURVEY WAS COMPLETED UNDER THE OVERSIGHT OF AN ACSM/THSOA CERTIFIED HYDROGRAPHER

W. Mel Saunders
W MEL SAUNDERS CH(152)

BATHYMETRY

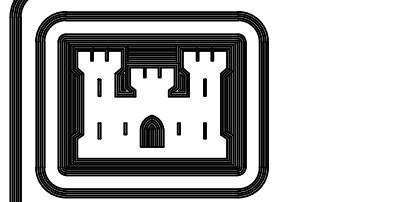

US ARMY CORPS OF ENGINEERS ALASKA DISTRICT

CONTRACT NO. W911KB-10-0005

CONTRACTOR ETRAC ENGINEERING, INC.

CITY SAN RAFAEL STATE CA

Date: _____

Approved: _____

Recommended: _____

PRIME CONTRACTOR

DATE: 06/13/13

Dwg Scale: 1" = 200'

Plot Scale: 1:1

File: FILE: 20130403.DWG

Branch: _____

Submitted: A. CHURCHILL

Chief: _____

USACE Survey No: 3030-13

U.S. ARMY ENGINEER DISTRICT CORPS OF ENGINEERS ANCHORAGE, ALASKA

Designed: S. OLSON

Drawn: S. OLSON

Reviewed: J. ANDERSON

Chief: _____

Section: _____

Branch: _____

COOK INLET, ALASKA



COOK INLET NAVIGATION CHANNEL

PREDREDGE SURVEY

APRIL 23, 2013

Reference number: V-105

Sheet 5 of 6

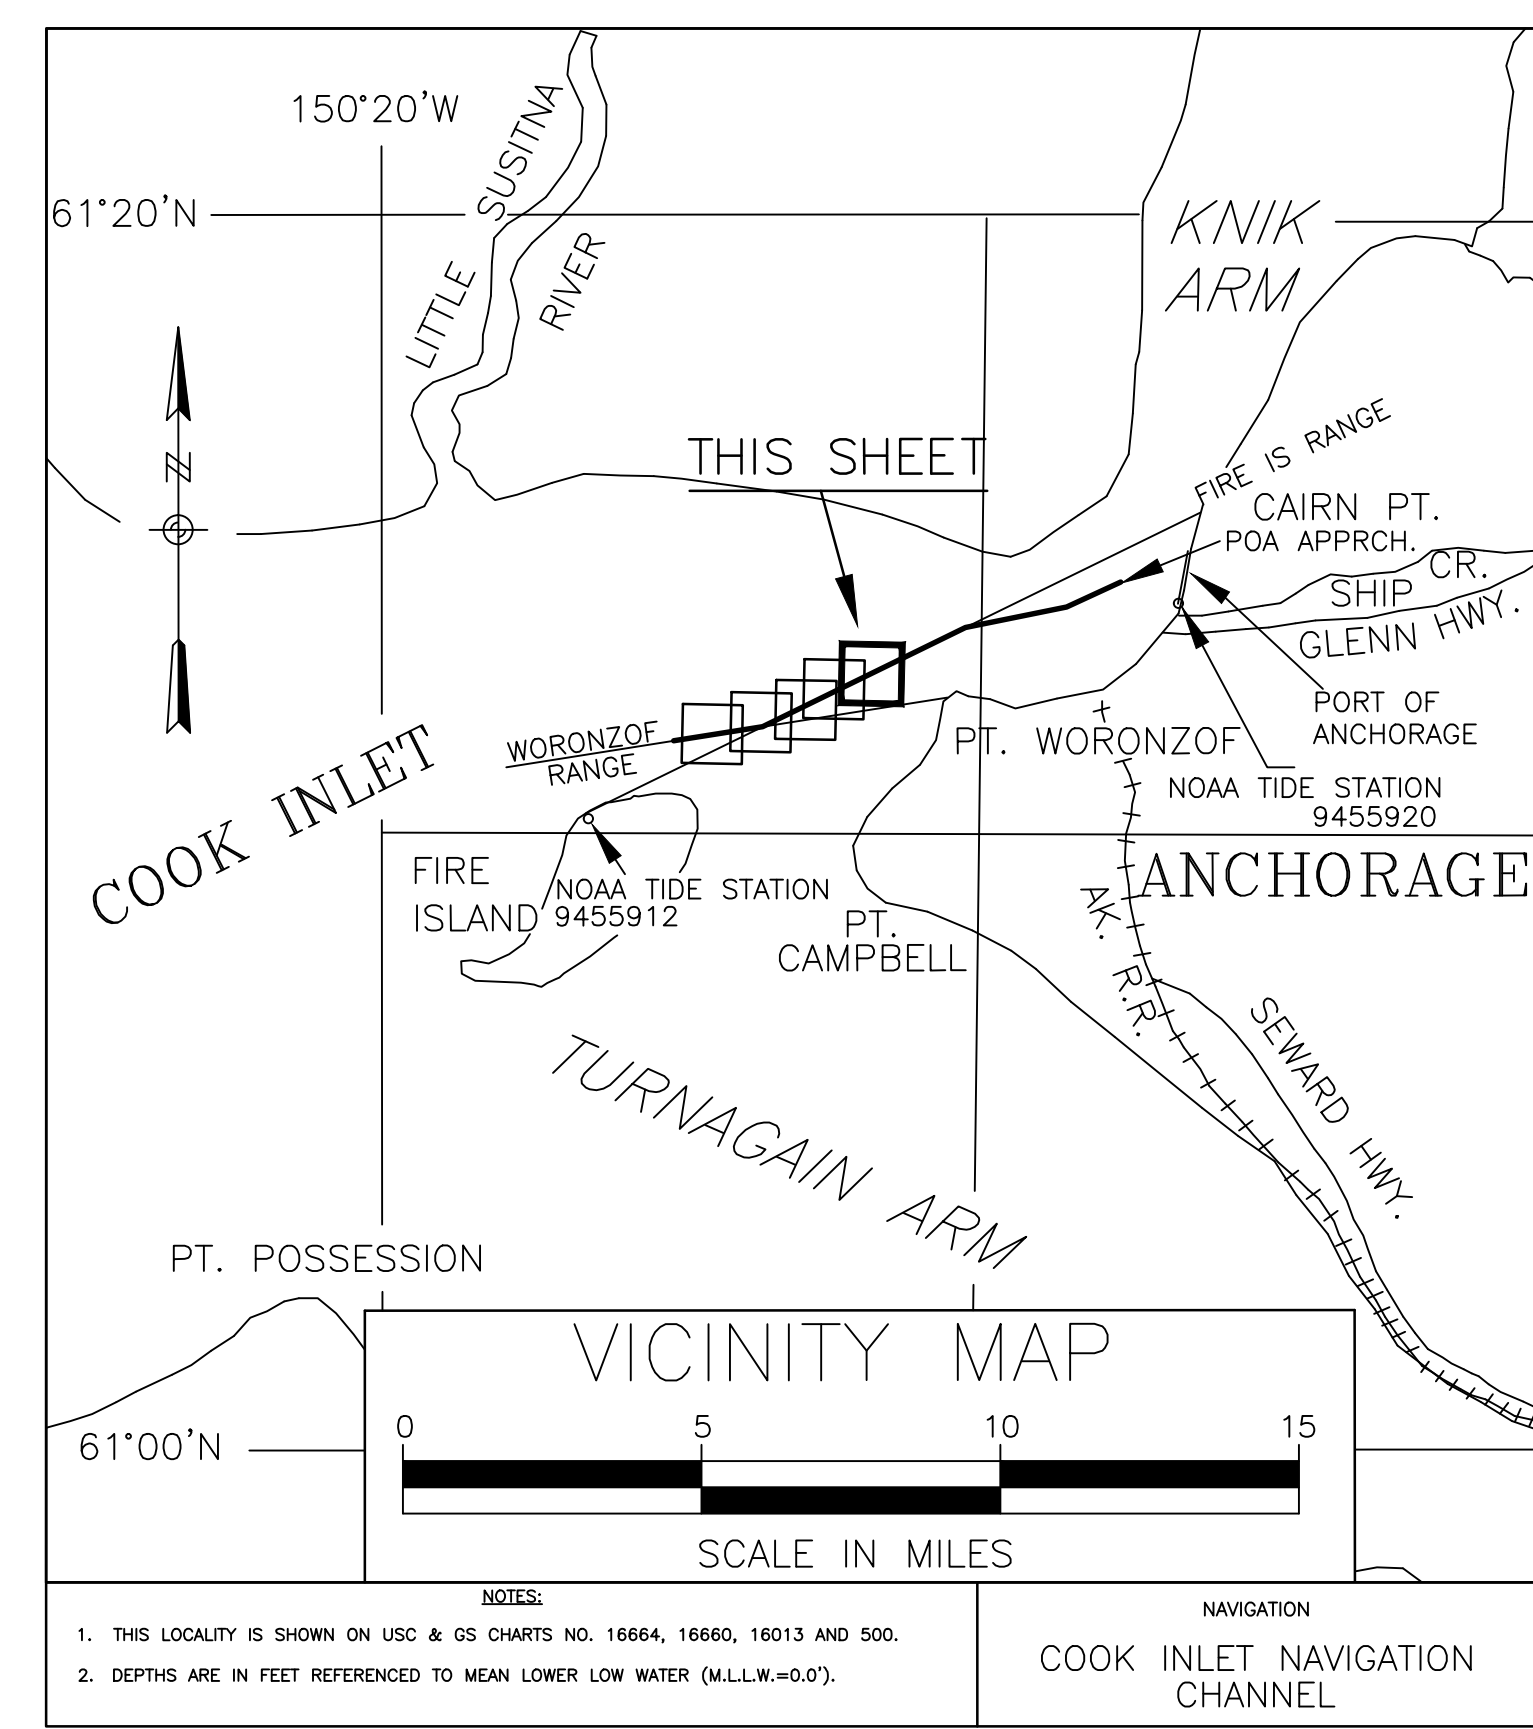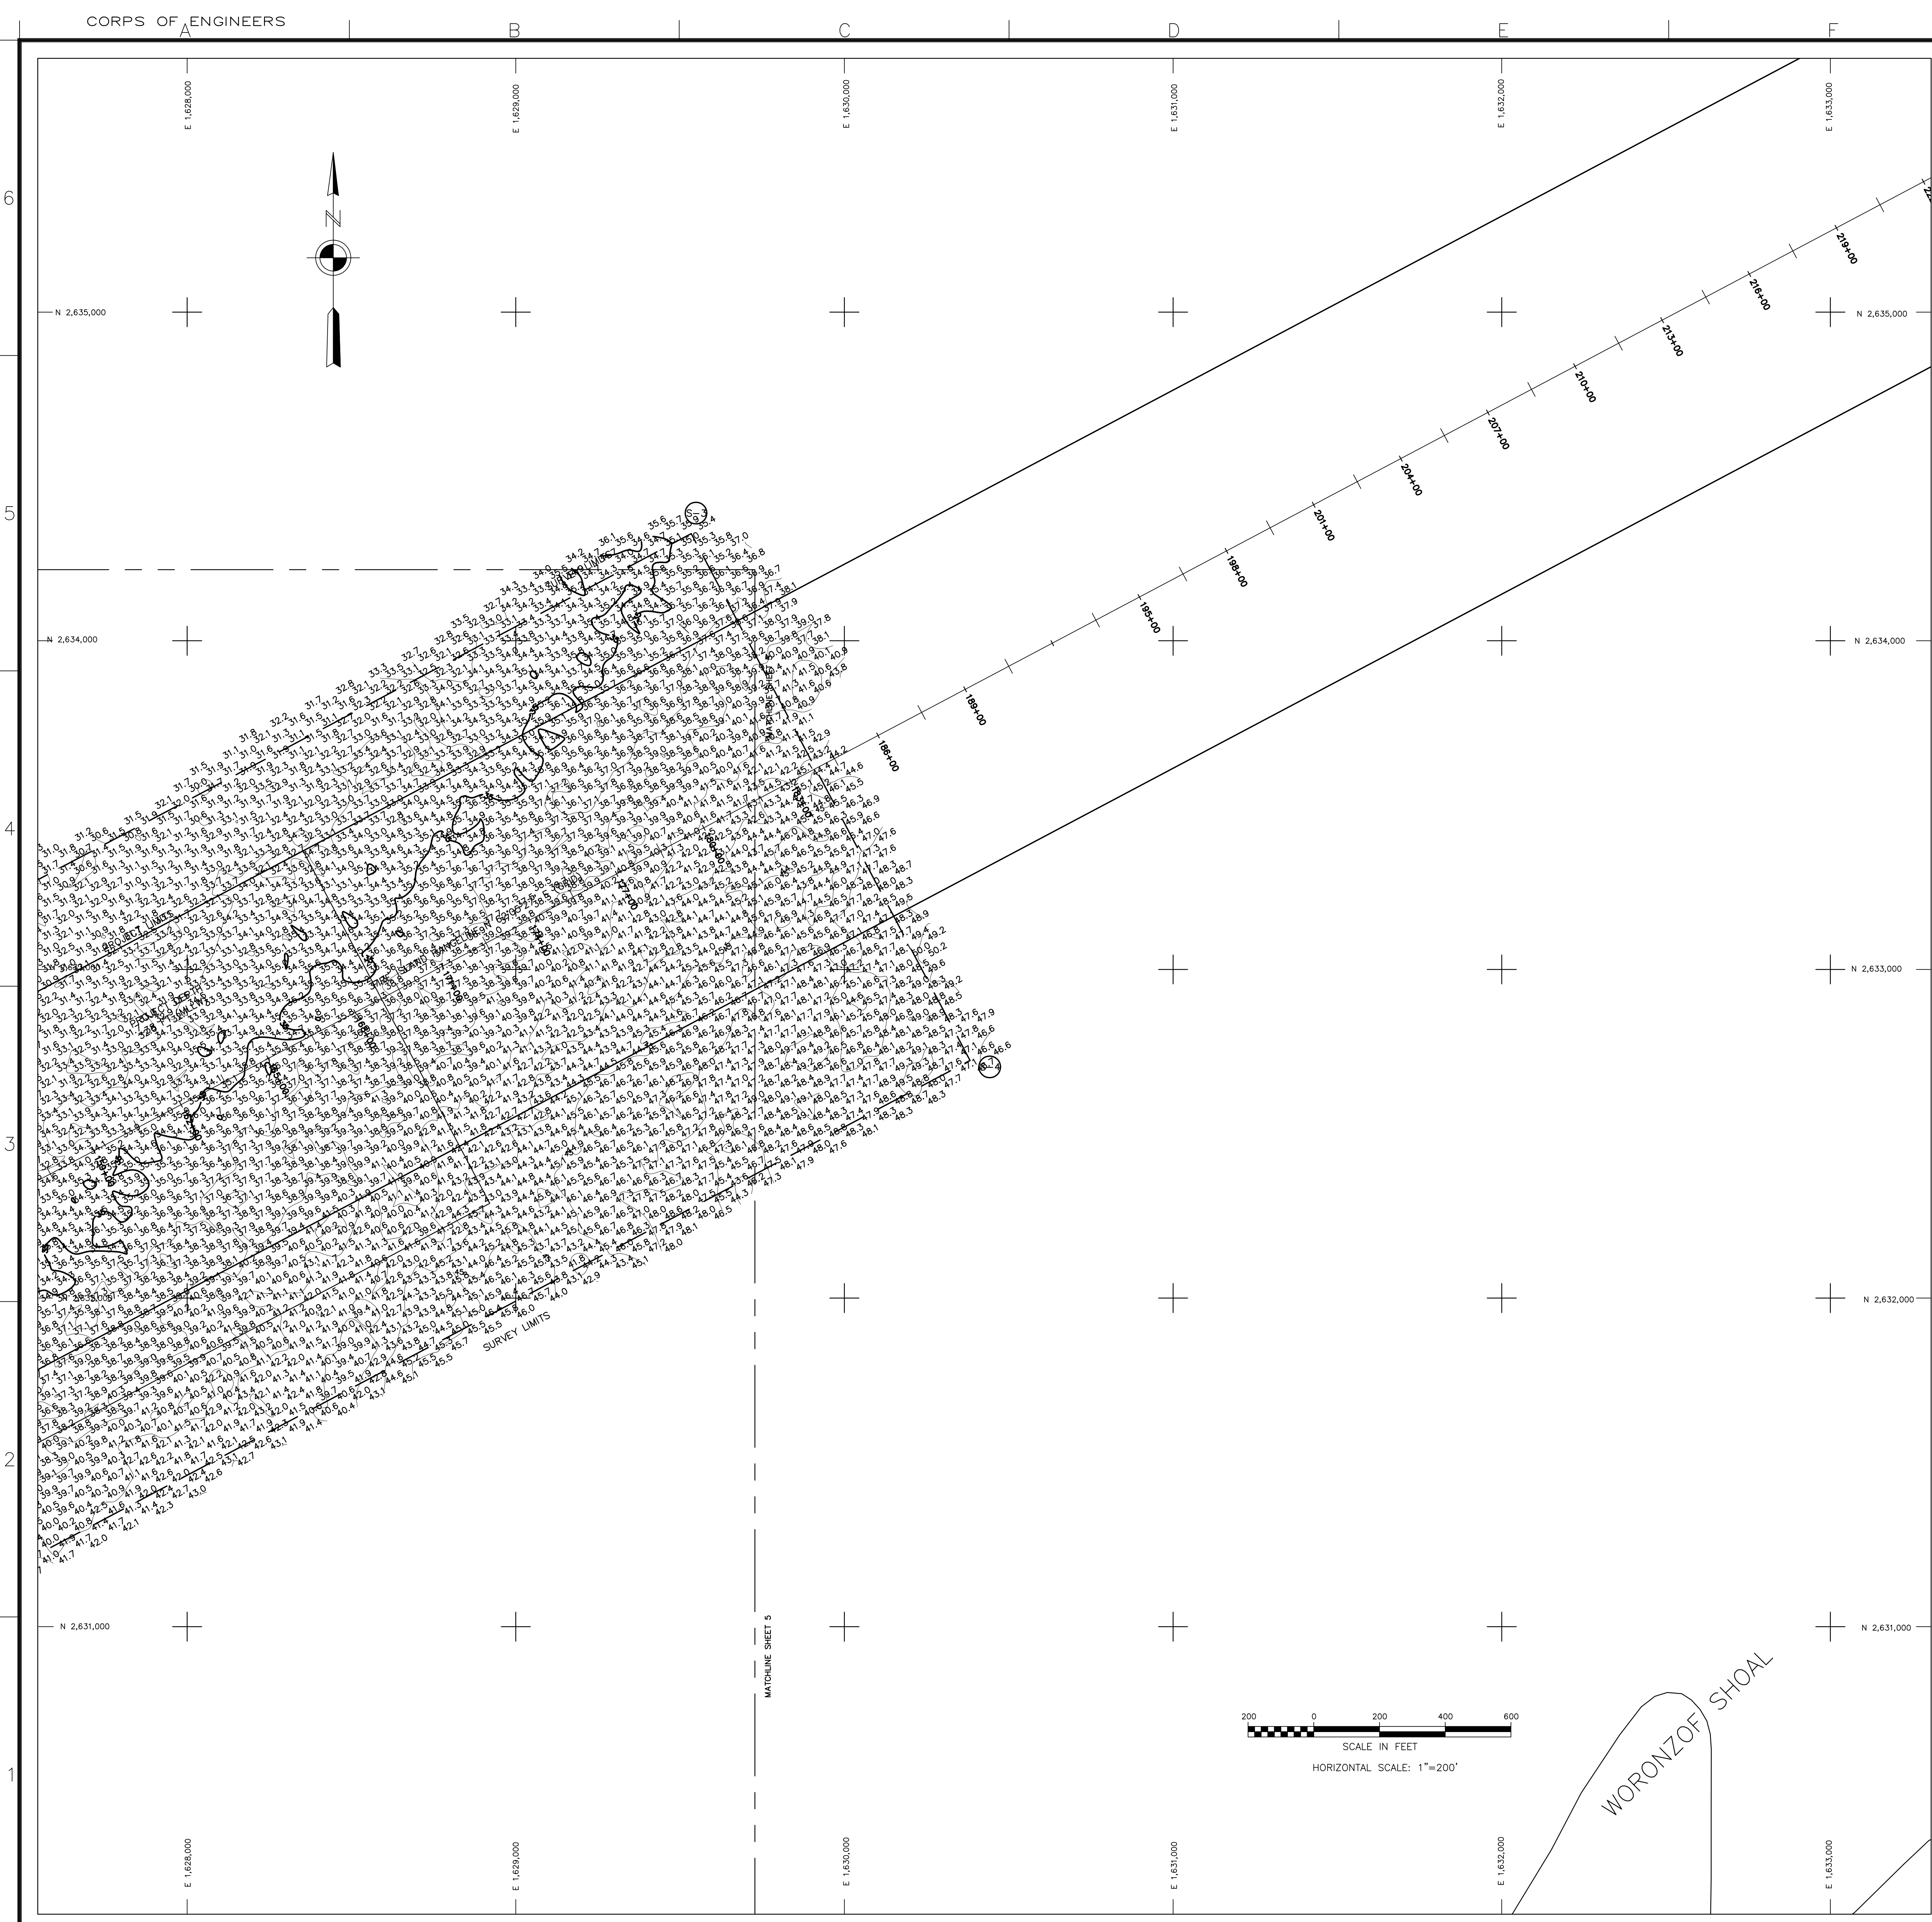

- NOTES
- HORIZONTAL CONTROL IS ALASKA STATE PLANE, ZONE 4, NAD83 IN U.S. SURVEY FEET HOLDING USACE "TERRA 11" AS N 2,644,969.84, E 1,660,159.24.
 - VERTICAL CONTROL: ELEVATIONS ARE MEAN LOWER LOW WATER (MLLW) TIDAL DATUM EPOCH 1983-2001, EXPRESSED IN U.S. SURVEY FEET. PRELIMINARY ELEVATIONS WERE ACQUIRED IN REFERENCE TO A SINGLE BENCHMARK HOLDING USACE "TERRA 11" AS 80.48 FEET MLLW. FINAL DATA WERE ADJUSTED BASED ON THE C.I.N.C. CUSTOM MLLW PLANE DETERMINED FROM THE DOWL C.I.N.C. CONTROL SURVEY CONDUCTED IN FEBRUARY, 2013.
 - SOUNDINGS ARE IN FEET AND ARE MINUS UNLESS OTHERWISE INDICATED.
 - THIS DRAWING INDICATES GENERAL CONDITIONS AT THE TIME OF SURVEY.
 - SURVEY WAS CONDUCTED ON APRIL 23, 2013 BY ETRAC ENGINEERING, INC. SOUNDINGS WERE COLLECTED USING AN R2SONIC 2024 MULTIBEAM DEPTH SOUNDER (200KHZ, 120-DEGREE SWATH-WIDTH WITH 256, 0.5 DEGREE BEAMS). SOUND VELOCITY PROFILES WERE MEASURED USING AN ODOM DIGI-BAR PRO. SOUND VELOCITY WAS MEASURED IN REAL TIME AT THE SOUNDER HEAD USING A VALEPORT MINIVS.
 - VESSEL POSITIONING, HEADING, ATTITUDE, AND RTK TIDES WERE PROVIDED IN REAL TIME USING AN APPLANIX POSMV WAVEMASTER GPS/INERTIAL POSITIONING SYSTEM RECEIVING RTK CORRECTIONS FROM A TRIMBLE SPS855 RECEIVER SET AT CONTROL STATION "TERRA 11" LOCATED ATOP THE PORT OFFICE BUILDING. POST-PROCESS KINEMATIC CORRECTIONS USING POSPAC MMS 5.4 SOFTWARE WERE APPLIED TO DATA FOLLOWING ACQUISITION. VESSEL NAVIGATION, DATA ACQUISITION AND PROCESSING WERE PERFORMED USING GPS INTEGRATED SOFTWARE.

2013 DREDGE LIMITS		
NAME	NORTHING	EASTING
S-1	2,628,306.44	1,616,361.71
S-2	2,628,820.67	1,619,140.63
S-3	2,634,325.95	1,629,533.82
S-4	2,632,722.93	1,630,382.13
S-5	2,627,396.25	1,620,329.73
S-6	2,626,716.44	1,616,655.34
S-7	2,626,423.49	1,613,948.61
S-8	2,626,423.49	1,616,773.28
S-9	2,624,254.99	1,613,948.61
S-10	2,624,254.99	1,616,773.28

2013 SURVEY LIMITS		
NAME	NORTHING	EASTING
S-1	2,628,306.44	1,616,361.71
S-2	2,628,820.67	1,619,140.63
S-3	2,634,325.95	1,629,533.82
S-4	2,632,722.93	1,630,382.13
S-5	2,627,396.25	1,620,329.73
S-6	2,626,716.44	1,616,655.34
S-7	2,626,423.49	1,613,948.61
S-8	2,626,423.49	1,616,773.28
S-9	2,624,254.99	1,613,948.61
S-10	2,624,254.99	1,616,773.28

CONTROL DATA				
POINT ID	NORTHING	EASTING	ELEV. (MLLW)	DESCRIPTION
PORT 1989	2,639,934.29	1,656,925.43	39.55	Almon
5920 THERMO 1 1988	2,642,784.70	1,660,183.87	37.32	Almon
S. END	2,644,296.27	1,659,738.03	40.50	USACE SBC 1978 (APPROX STA 63+67.98)
ETRAC-2	2,644,443.04	1,660,120.66	36.38	Brass Cap
TERRA 11	2,644,969.84	1,660,159.24	80.48	Antennae Reference Point
TERRA 12	2,644,990.65	1,660,166.56	81.21	Antennae Reference Point
ETRAC-1	2,646,395.57	1,660,814.72	38.34	Brass Cap
N. END	2,646,649.84	1,660,584.80	41.56	USACE SBC 1978 (APPROX STA 88+73.09)



THIS HYDROGRAPHIC SURVEY WAS COMPLETED UNDER THE OVERSIGHT OF AN ACSM/THSOA CERTIFIED HYDROGRAPHER

W MEL SAUNDERS CH(152)

BATHYMETRY

US ARMY CORPS OF ENGINEERS ALASKA DISTRICT

CONTRACT NO. W911KB-10-0005

CONTRACTOR ETRAC ENGINEERING, INC.

CITY SAN RAFAEL STATE CA

Recommended: Approved: Resident Engineer

Date: 06/13/13

Dwg Scale: 1" = 200'

Plot Scale: 1:1

File: FILE_20130423_DRAWS.dwg

Designed: S. OLSON

Drawn: S. OLSON

Reviewed: J. ANDERSON

Submitted: A. CHURCHILL

USACE Survey No: 3090-13

COOK INLET, ALASKA

COOK INLET NAVIGATION CHANNEL

PREDREDGE SURVEY

APRIL 23, 2013

Reference number:

V-106

Sheet 6 of 6